

VENTS D Series



Axial fans for exhaust ventilation with air capacity up to 341 m³/h

Application

- Continuous or periodic exhaust ventilation of bathroom, showers, kitchens and other utility spaces.
- Ventilation shaft mounting or duct connection.
- Low to medium air flow motion for short distances at low air resistance.
- Compatible with Ø 100, 120, 125 and 150 mm air ducts.



Design

- Ultra slim front panel – only 6.5 mm.
- Modern design and aesthetic look.
- The casing and the impeller are made of high-quality durable ABS plastic, UV resistant.
- The intellectual impeller design makes the fan efficiency high and the service life long.
- Insect screen.
- Protection rating IP34.

Motor

- Reliable and low-watt electric motor.
- Designed for continuous operation and requires no maintenance.
- Equipped with overheating protection.

Modifications and Options

D1 – shortened spigot model.



DK – fan is equipped with a backdraft damper for back flow preventing.



DL – the motor is equipped with ball bearings for long service life (appr. 40 thousand hours) and fan mounting at any angle. The bearings are maintenance-free and contain enough grease for the entire operating period.



D turbo – high-powered motor.



D 12 – modification with low-voltage motor. 12 V AC power supply.



DT – equipped with a regulated timer with the operating time from 2 to 30 minutes.



DTH – equipped with a timer with the operating time from 2 to 30 minutes and a humidity sensor with the threshold value from 60 to 90 %.



DV – equipped with a pull cord switch.



DVT – equipped with a pull cord switch and a regulated timer with the operating time adjustable from 2 to 30 minutes.



DVTH – equipped with a pull cord switch, regulated timer with the operating time adjustable from 2 to 30 minutes and a humidity sensor with the operating threshold range from 60 to 90 %.

Control

Manual:

- The fan is controlled by a room light switch. It is not included in the delivery set.
- The fan is controlled by the built-in **V** pull cord switch. Not applied in case of ceiling mounting.
- Speed control is possible through a thyristor speed controller (see Electrical Accessories). Several fans may be connected to the same controller. Speed controllers can not be connected to the fans with the T, TH, TP, VT, VTH modifications.

Automatic:

- By the **BU-1-60** electronic control unit (see Electrical Accessories). The control unit is supplied separately.
- By the **T** timer (the built-in turn-off delay timer enables the fan operation within 2 to 30 minutes after the fan switching off).
- By the humidity sensor and the **TH** timer (if the humidity level in the room exceeds the sensor threshold adjustable value within 60-90 %, the fan switches automatically on and operates until the humidity level drops to the standard level, after that the fan continues operating within the time period according to the timer setting, then shuts down).


Mounting features

- The fan is mounted directly into the ventilation shaft.
- In case of remote location of the ventilation shaft flexible air ducts may be used. The air duct is connected to the fan exhaust flange through a clamp.
- Fixed to the wall by means of screws.
- Suitable for ceiling mounting.
- To connect a fan with a 12 V low voltage motor to 220 V/50 Hz power mains, it is necessary to purchase a step-down transformer (e.g. the TRF 220/12-25 transformer).

Accessories



Aerodynamic characteristics

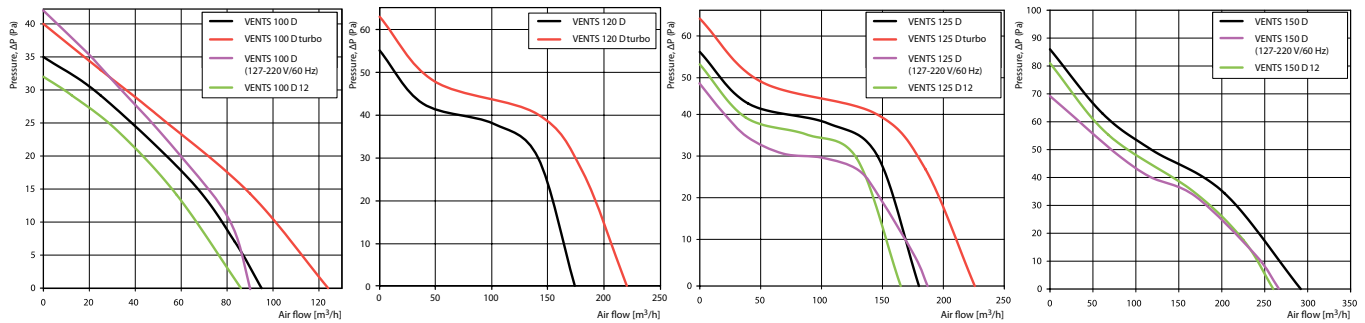

Technical data

Model	Frequency [Hz]	Voltage [V]	Power Consumption [W]	Current [A]	R.p.m.	Maximum air flow [m³/h]	Sound Pressure Level [dBA]*	Weight [kg]
VENTS 100 D	50	220-240	14	0.085	2300	95	34	0.58
VENTS 100 D (220 V/60 Hz)	60	220						
VENTS 100 D turbo	50	220-240	16	0.1	2300	124	37	0.66
VENTS 100 D turbo (220 V/60 Hz)	60	220						
VENTS 100 D (127-220 V/60 Hz)	60	127	10	0.115	2500	90	34	0.59
		220	9	0.054				
VENTS 100 D 12	50	12	14	1.5	2200	86	33	0.60
VENTS 120 D	50	220-240	17	0.1	2400	174	36	0.74
VENTS 120 D (220 V/60 Hz)	60	220						
VENTS 120 D turbo	50	220-240	24	0.105	2400	220	37	0.81
VENTS 120 D turbo (220 V/60 Hz)	60	220						
VENTS 125 D	50	220-240	16	0.1	2400	180	35	0.74
VENTS 125 D (220 V/60 Hz)	60	220						
VENTS 125 D turbo	50	220-240	24	0.105	2400	226	37	0.81
VENTS 125 D turbo (220 V/60 Hz)	60	220						
VENTS 125 D (127-220 V/60 Hz)	60	127	16	0.119	2400	185	36	0.75
		220	15	0.102				
VENTS 125 D 12	50	12	16	1.7	2300	165	34	0.69
VENTS 150 D	50	220-240	24	0.13	2400	292	38	0.92
VENTS 150 D (220 V/60 Hz)	60	220						
VENTS 150 D (127-220 V/60 Hz)	60	127	25	0.338	2350	267	38	0.93
		220	25	0.175				
VENTS 150 D 12	50	12	29	2	2300	260	37	0.88


*Sound pressure level measured in free space at a distance of 3 meters from the fan.

Mounting example



Overall dimensions

Model	Dimensions [mm]		
	Ø D	B	L
VENTS 100 D	100	150	109
VENTS 100 D1	100	150	95
VENTS 120 D	117	176	107
VENTS 125 D	125	176	113
VENTS 125 D1	125	176	96
VENTS 150 D	150	205	132



Certificates

The fans meet the applicable safety and electromagnetic compatibility standards.